


COOLING

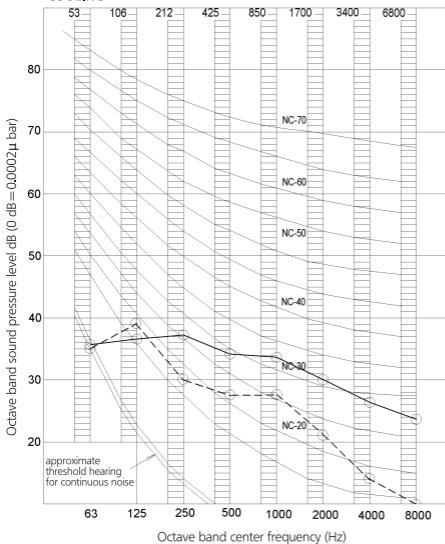

NOTES

1 Overall (dB)

Scale	230V/50Hz 220V/60Hz (H)	230V/50Hz 220V/60Hz (L)
A	38	30

(B,G,N is already rectified)

2 Measuring place: Measure in anechoic room

3 Operation noise differs with operation and ambient conditions.

4 The operating sound is based on the rear side suction inlet, and the external static pressure 40Pa.

5 Operating conditions:

Power source 230V 50Hz/220V 60Hz

6 Standard external static pressure

JIS

○—○ (H) 230V 50Hz/220V 60Hz

○---○ (L) 230V 50Hz/220V 60Hz

7 Location of microphone:

