



NOTES

- Operation noise differs with operation and ambient conditions.
- The operating sound is based on the rear side suction inlet and the external static pressure 40Pa.
- Over All (dB):
(B.G.N is already rectified)
- Operating conditions:

- Power source: 230V/50Hz, 220V/60Hz
- JIS: Standard External Static Pressure
 ○—○ (H) 230V/50Hz 220V/60Hz
 ○---○ (L) 230V/50Hz 220V/60Hz
- Cooling

5 Measuring place: measure in anechoic room.

6 Location of microphone:

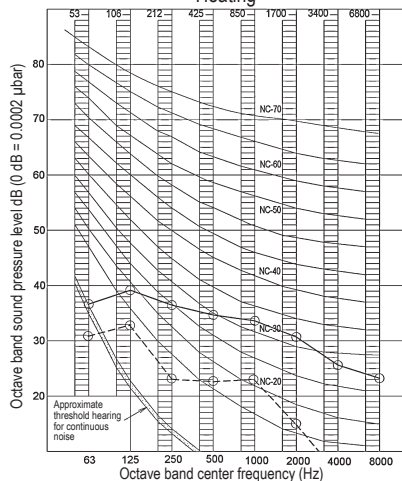

NOTES

- Operation noise differs with operation and ambient conditions.
- The operating sound is based on the rear side suction inlet and the external static pressure 40Pa.
- Over All (dB):
(B.G.N is already rectified)
- Operating conditions:

- Power source: 230V/50Hz, 220V/60Hz
- JIS: Standard External Static Pressure
 ○—○ (H) 230V/50Hz 220V/60Hz
 ○---○ (L) 230V/50Hz 220V/60Hz
- Heating

5 Measuring place: measure in anechoic room.

6 Location of microphone:

