


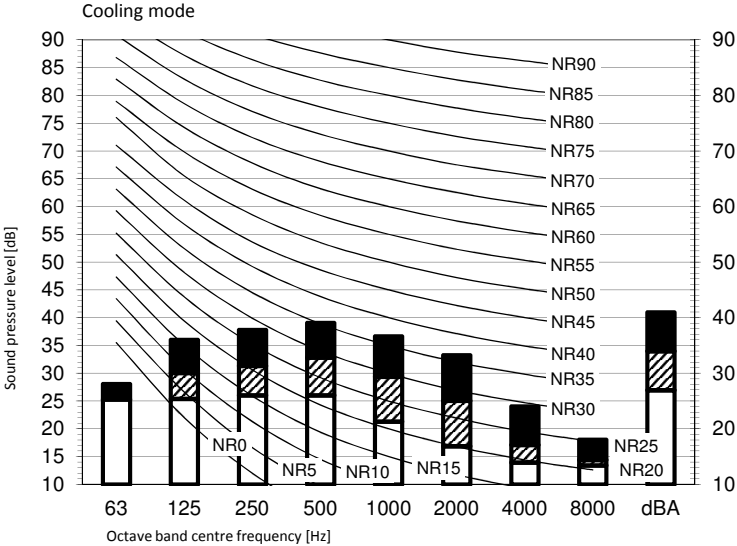

Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).


A Scale

- B
- High-tap
- Medium-tap
- C
- Low-tap

Location of microphone



Cooling	Total dB	
A	B	C
dBA	41	27

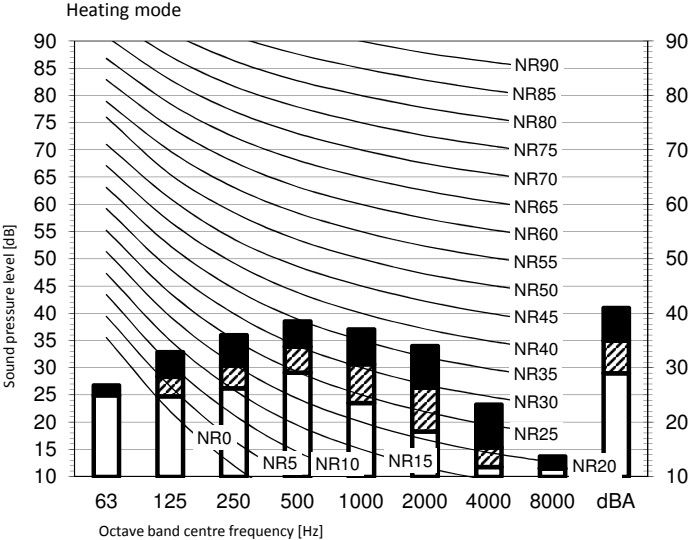

Heating	Total dB	
A	B	C
dBA	41	29