


FXUQ100A

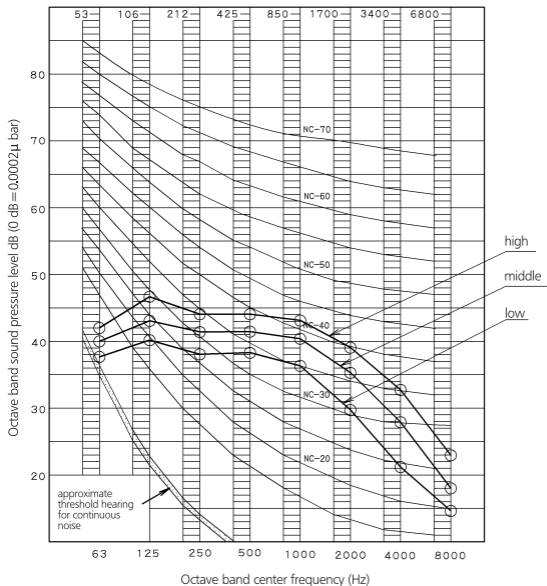

NOTES

1 Overall (dB)

Scale	Mode		
	high	middle	low
A	47.0	44.0	40.0
C	51.2	48.4	45.2

(dBA is already rectified)

- Measuring place: Anechoic chamber
- Operation noise differs with operation and ambient conditions.
- Operating conditions: Power source: 220-240V 50Hz/220•230V 60Hz
- Cooling: Return air temperature: 27°CDB, 19°CWB
Outdoor temperature: 35°CDB, 24°CWB
- Heating: Return air temperature: 20°CDB, 15°CWB
Outdoor temperature: 7°CDB, 6°CWB
- Location of microphone

