
REYQ16P8

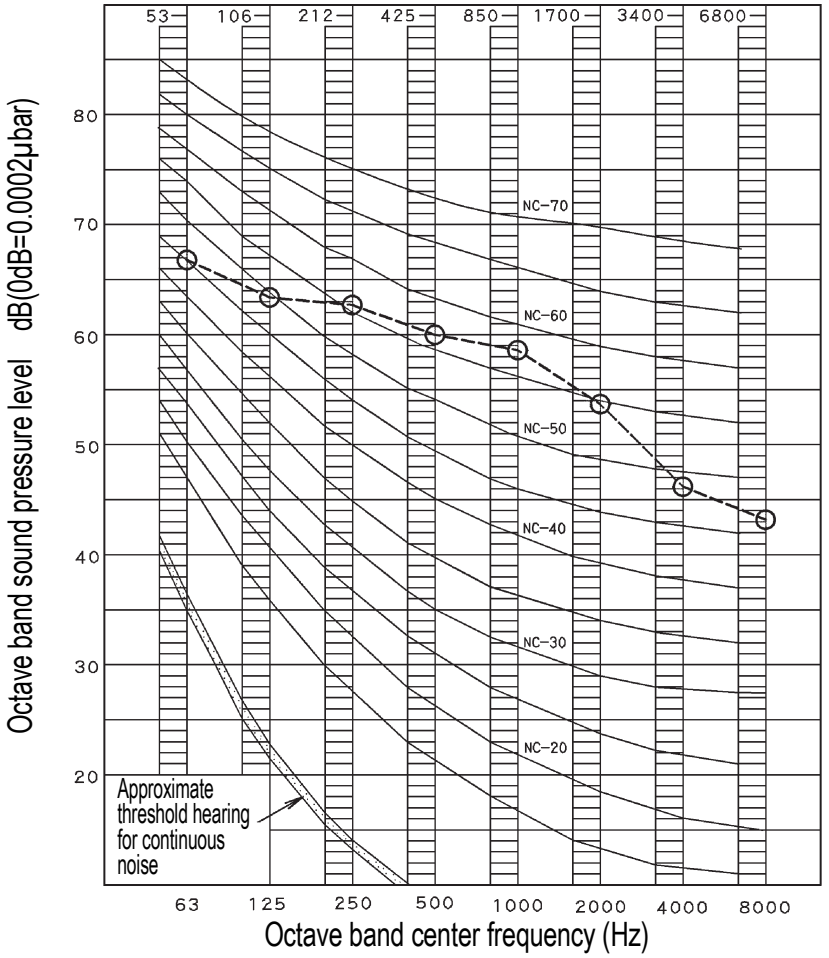

4D058298A

NOTE

1 Over All (dB):
(B, G, N is already rectified)

Scale	50Hz
A	63
C	70

2 Operating conditons:
- Power source Y1: 380-415V 50Hz
- JIS standard

3 Measuring place: Anechoic chamber (conversion value)
The operating sound is measured in anechoic chamber, if it is measured under the actual installation conditions, it is normally over the set value due to environmental noise and sound reflection.

4 Location of microphone

