


HEAT RECOVERY OPERATION

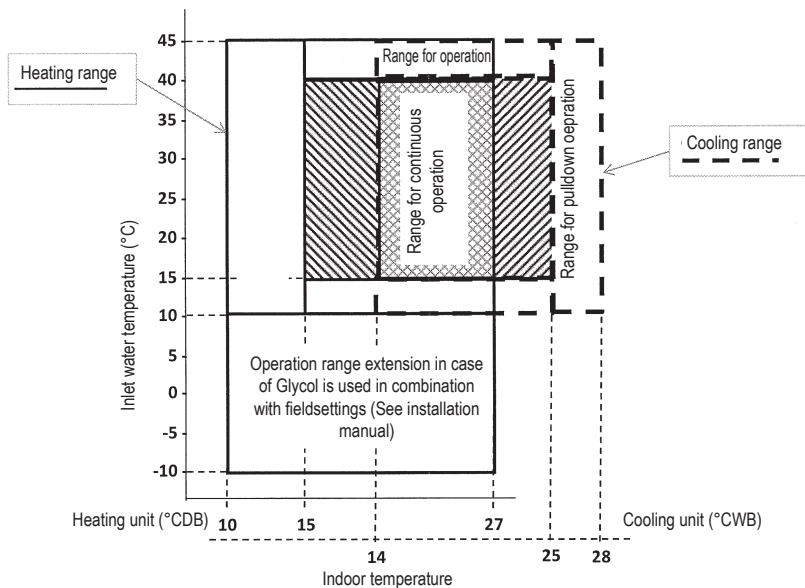

NOTES

1. Cooling operation range is kept in any case
2. This figure shows the range which can be operated when the water flow is between 50~150 l/min.
3. Design within the following condition range:
water temperature: 20 ~ 35 °C
water volume: 60 l/min or more
4. When cooling load is small, thermostat-off may be carried out for freeze-up protection
5. Hold ambient temperature at 0~40°C and humidity at 80%RH or less.