


FXCQ20A

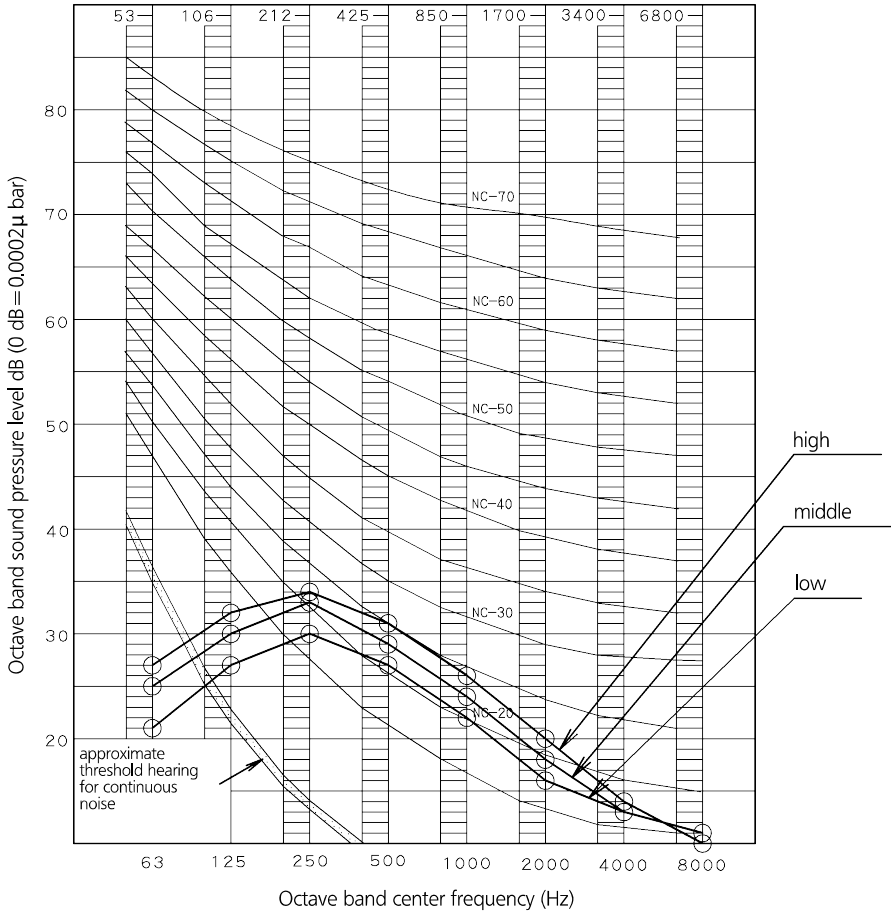

NOTES

1 Overall (dB)

Scale	Mode		
	high	middle	low
A	32.0	30.0	28.0
C	38.3	36.3	33.9

(B,G,N is already rectified)

- 2 Measuring place: Anechoic chamber
- 3 Operation noise differs with operation and ambient conditions.
- 4 Operating conditions: Power source: 220-240V 50Hz
- 5 Cooling: Return air temperature: 27°CDB, 19°CWB
Outdoor temperature: 35°CDB, 24°CWB
- 6 Heating: Return air temperature: 20°CDB, 15°CWB
Outdoor temperature: 7°CDB, 6°CWB
- 7 Location of microphone

