


FXDQ63A3

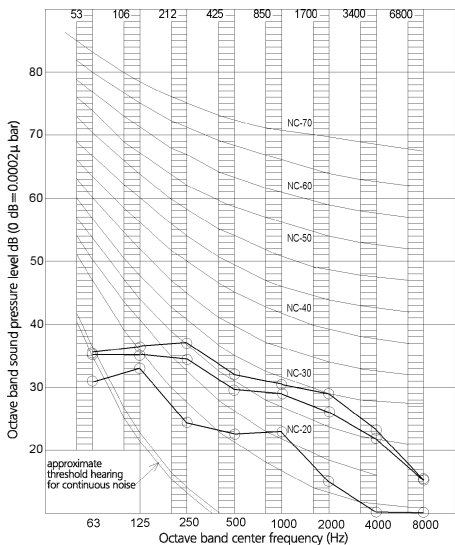

NOTES

1 Overall (dB)

Scale	Air flow rate		
	H	M	L
A	36	34	30

(B,G,N is already rectified)

2 Measuring place: Anechoic chamber

3 Operation noise differs with operation and ambient conditions.

4 The operating sound is based on the rear side suction inlet, and the external static pressure 15Pa.

5 Operating conditions:

Power source 220-240V/50Hz, 220V/60Hz


Cooling: Return air temperature: 27°CDB, 19°CWB

Outdoor temperature: 35°CDB, 24°CWB

Heating: Return air temperature: 20°CDB, 15°CWB

Outdoor temperature: 7°CDB, 6°CWB

6 Location of microphone:



4D081445