
## FXMA125A

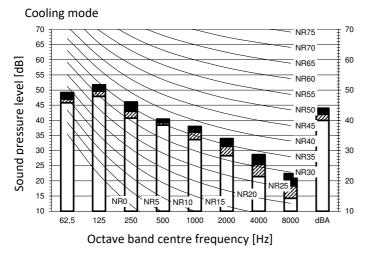

Legend dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

B Fan speed: High

c Fan speed: Medium

**D** Fan speed: Low

Cooling			Total dB	
Α	В	С	D	
dBa	44,0	42,0	40,0	

Heati	ing	Total dB		
Α	В	С	D	
dBa	44,0	42,0	40,0	

Location of microphone

Air inlet duct

Unit

1.5m

Minimum: ·1m·

## Heating mode 65 60 60 Sound pressure level [dB] 55 50 50 35 NR40 30 30 25 20 20 15 NR5 NR10 125 250 500 1000 2000 4000 8000 dBA Octave band centre frequency [Hz]

## Notes

- 1) Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 2) Background noise already taken into account.
- 3) Operating noise varies depending on operation and ambient conditions.
- 4) The operation noise measuring method is in accordance with JISC9612.
- 5) Measuring location: anechoic chamber