


FXSA100A  
FXSA125A

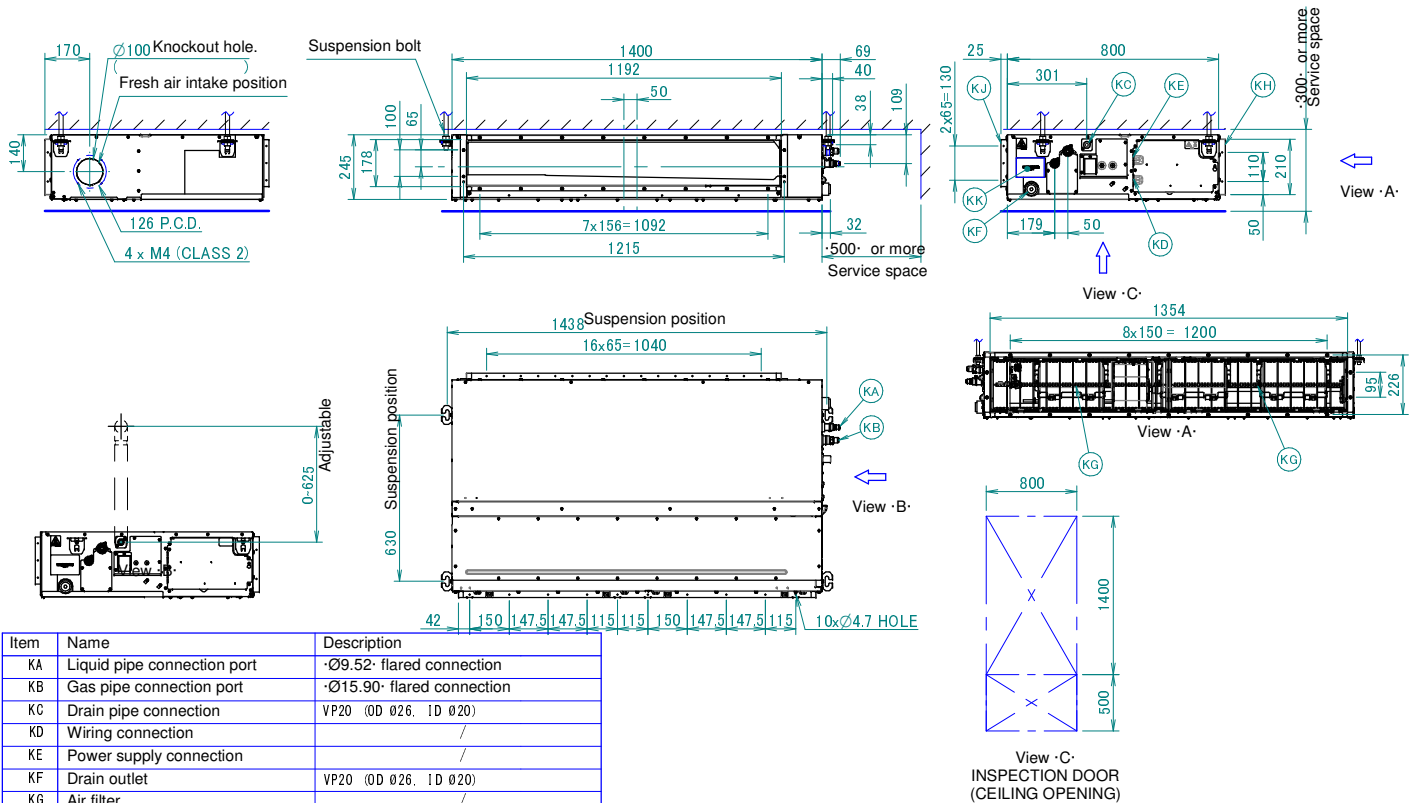

| Item | Name                        | Description                |
|------|-----------------------------|----------------------------|
| KA   | Liquid pipe connection port | ·Ø9.52· flared connection  |
| KB   | Gas pipe connection port    | ·Ø15.90· flared connection |
| KC   | Drain pipe connection       | VP20 (OD Ø26, ID Ø20)      |
| KD   | Wiring connection           | /                          |
| KE   | Power supply connection     | /                          |
| KF   | Drain outlet                | VP20 (OD Ø26, ID Ø20)      |
| KG   | Air filter                  | /                          |
| KH   | Air suction side            | /                          |
| KJ   | Air discharge side          | /                          |
| KK   | Nameplate                   | /                          |

- Notes
- When installing optional accessories, refer to their respective documentation.
  - The ceiling depth varies according to the documentation of the specific system.
  - In case of bottom suction, mount the chamber cover to the backside of the unit. For more information, refer to the installation manual.
  - In case of rear suction, mount the chamber cover to the bottom side of the unit. For more information, refer to the installation manual.