


FXZA40A

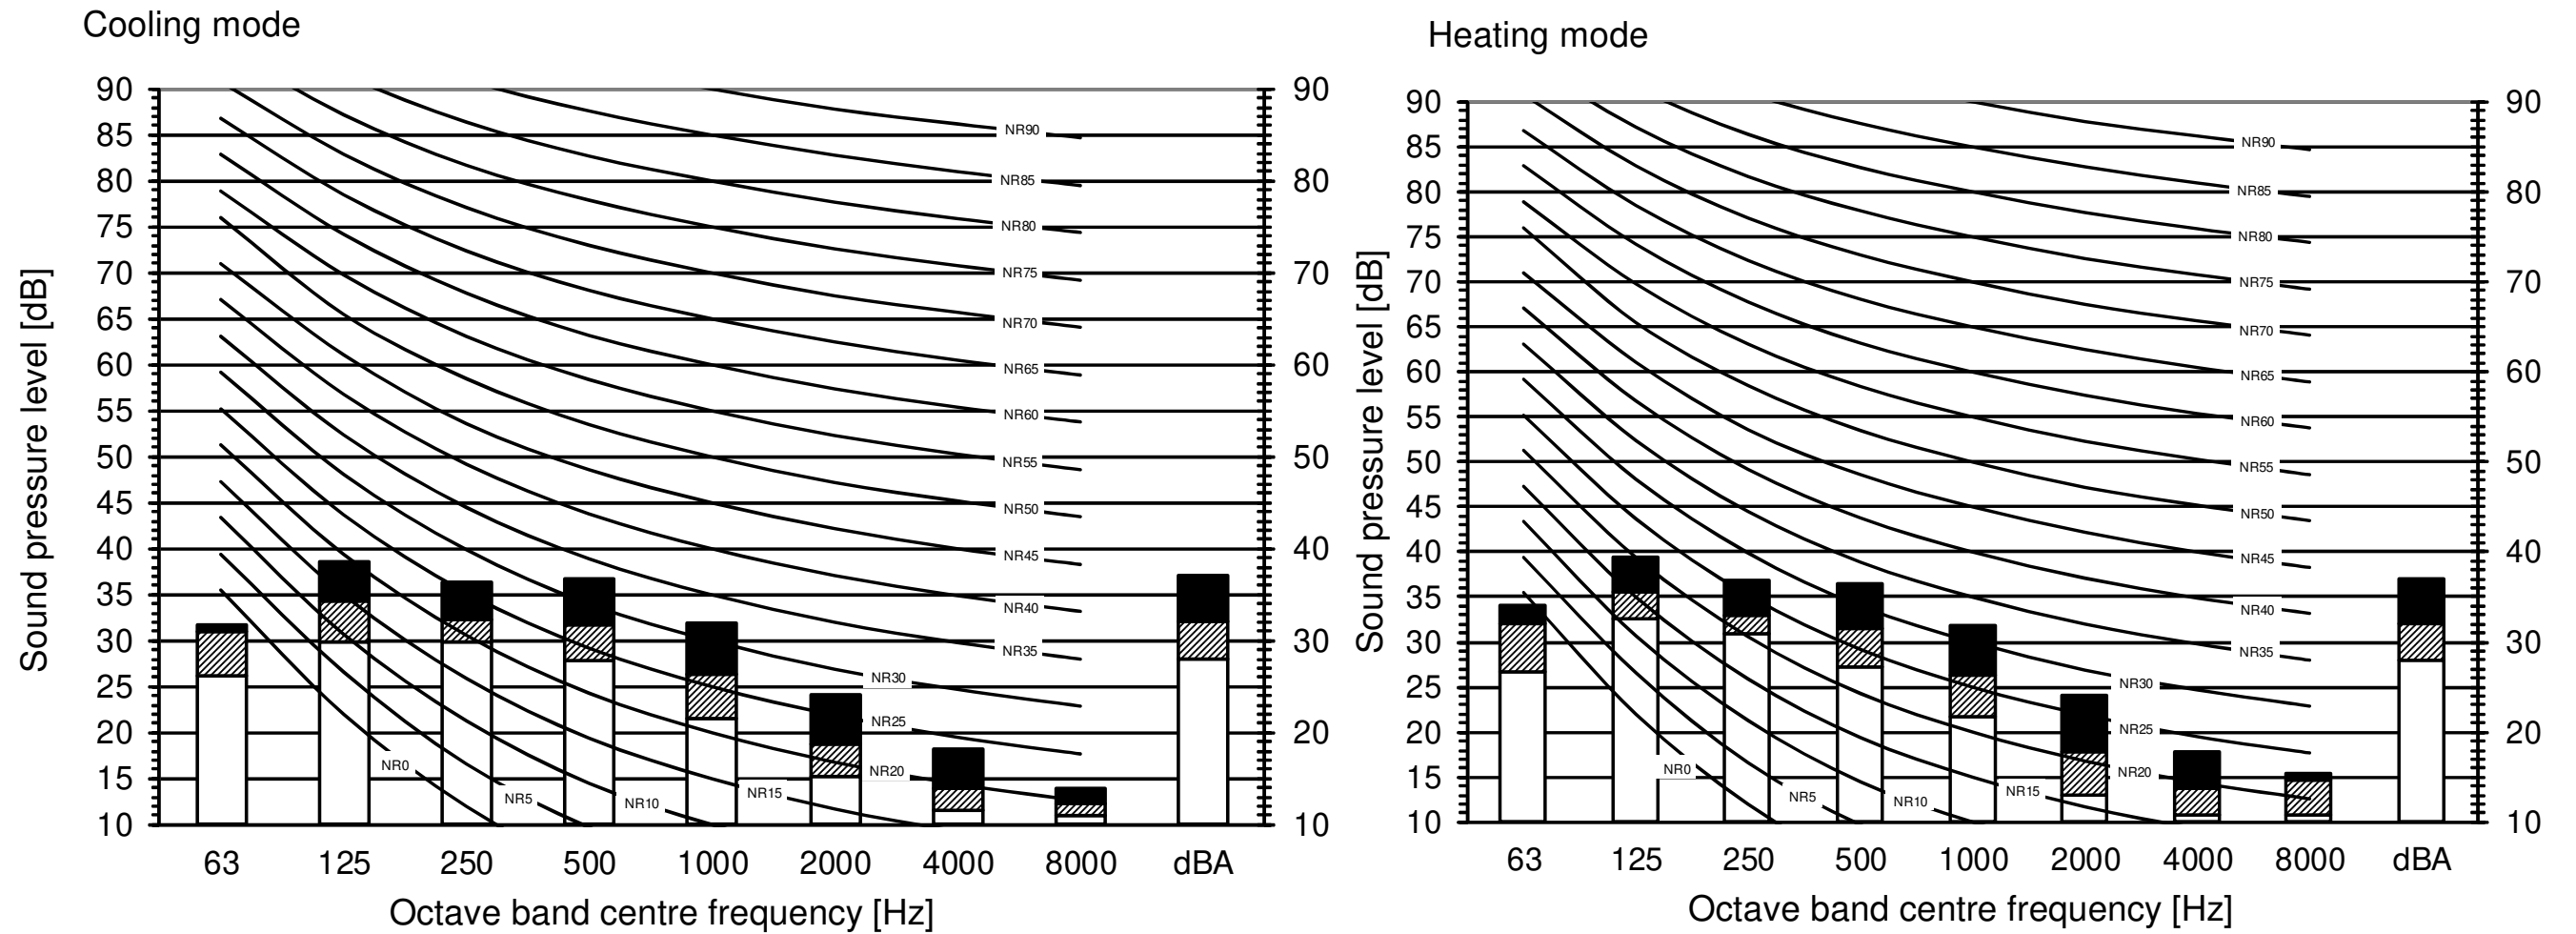

Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B High
- C Medium
- D Low


Cooling Total dBA

| A | B | C | D |
|-----|------|------|------|
| dBA | 37.0 | 32.0 | 28.0 |

Heating Total dBA

| A | B | C | D |
|-----|------|------|------|
| dBA | 37.0 | 32.0 | 28.0 |

Location of microphone

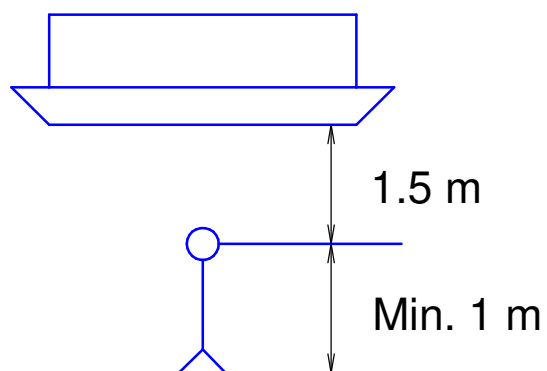

Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber