


For single unit installation    For installation in rows

For centralised group layout

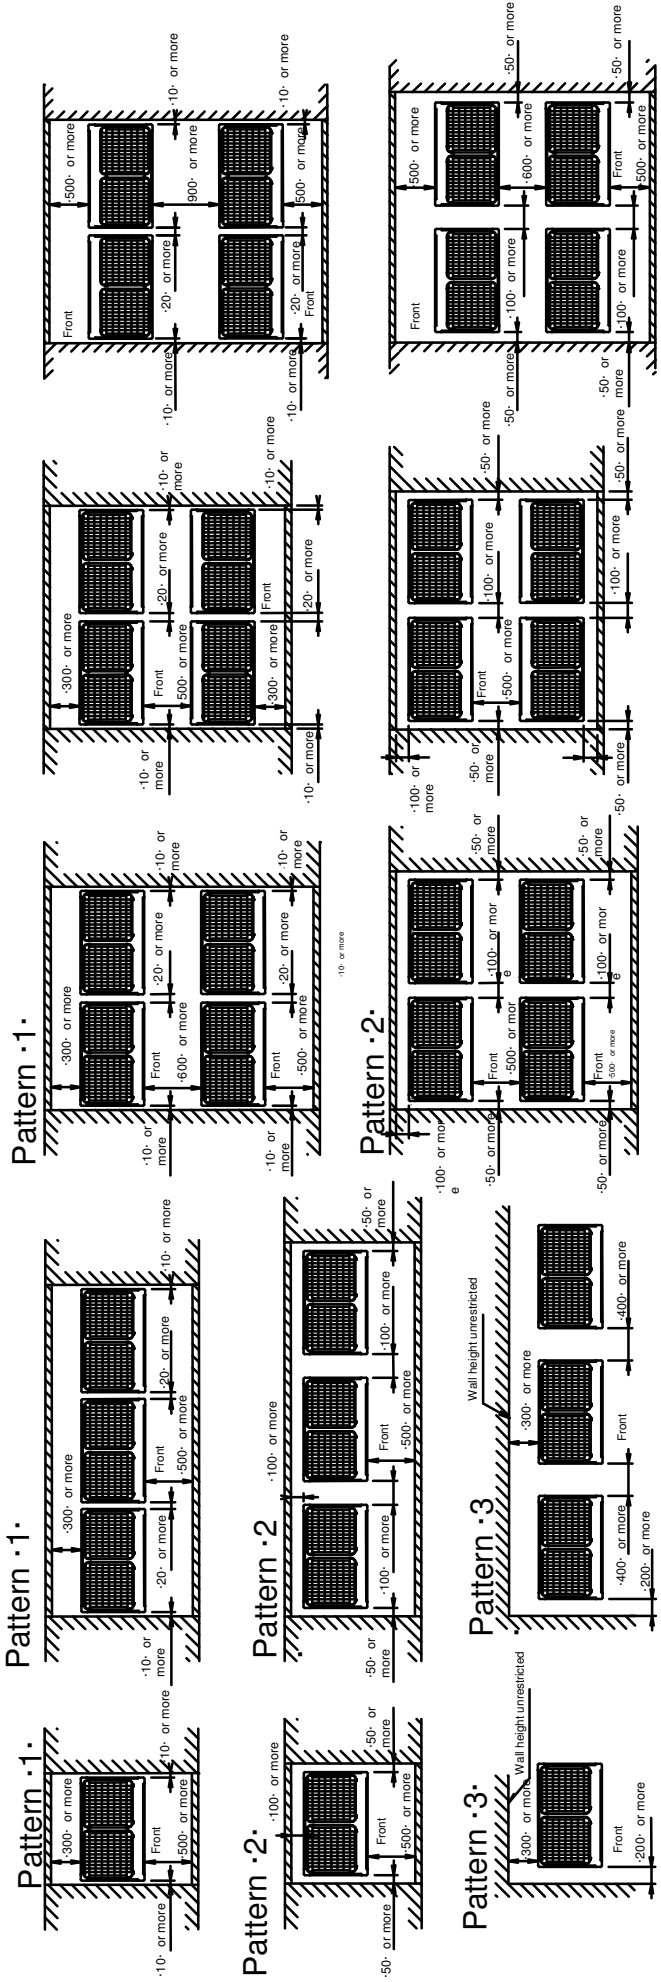

Notes

1. Height of the walls in case of patterns 1 and 2:

Front: 1500 mm

Suction side: 500 mm

Side: height unrestricted

The installation space shown on this drawing is based on cooling operation at 35°C (outdoor temperature).

When the design outdoor ambient temperature exceeds 35°C or the load exceeds maximum ability of much generation load of heat in all outdoor unit, make sure the suction-side space is broader than the space shown on this drawing.

2. If the walls are higher than mentioned above, then additional service space is needed:

- suction side: service space + h1/2

- front side: service space + h2/2

3. When installing the units, select the pattern that best fits the available space.

Always keep in mind to leave sufficient space for a person to pass between unit and wall and for the air to circulate freely.

Provide sufficient space at the front to connect refrigerant piping (comfortably).

4. If more units are to be installed than are catered for in the above patterns, your layout should take into account of the possibility of short circuits.

