





RXYQ14-20UD



Detail A




Detail -B-

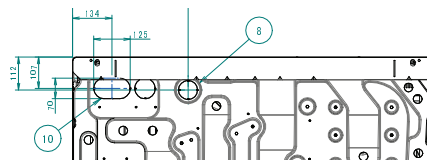


View .C.


Model	AA	AB
RXYQ14-20U*RYYQ14-20U, RXYQQ14-20U, RXYTQ10-16U	-	-
RYMQ14-16U, REYQ14-20U, REYA14-20A	240	240
RYMQ18-20U	240	192

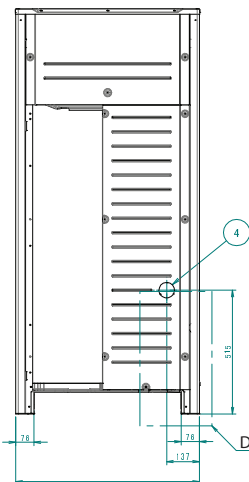

Detail -B-

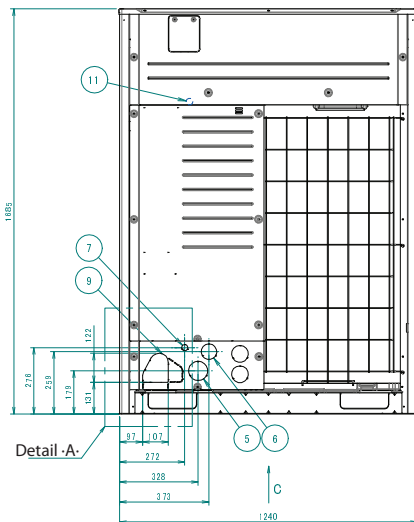

Detail ·A·

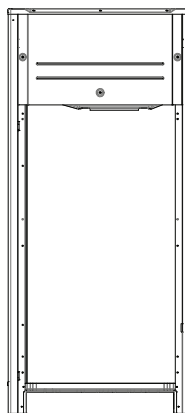

NOTES

1. Detail -A- and detail -B- indicate the dimensions after fixing the attached piping.
2. Items -4 - 10: Knockout hole.
3. **Gas pipe**

3. Gas pipe

RXYTQ10U	: Ø .22.2· brazing connection
REYQ14-20U, REYA14-20A	: Ø .25.4· brazing connection
RYYQ14-20U, RYMQ14-20U RXYQ14-20U*, RXYQQ14-20U, RXYTQ12-16U	: Ø .28.6· brazing connection

Liquid pipe

XYTQ10U	: Ø 9.5- brazing connection
RYQ14-16U, RYMQ14-16U, RXYQ14-16U,*	
XYQQ14-16U, REYQ	
14-20U, REYA14-20A, RXYTQ12-16U	: Ø 12.7- brazing connection
RYQ18-20U, RYMQ18-20U, RXYQ18-20U,*	
XYQQ18-20U	: Ø 15.9- brazing connection

Equalising pipe

RYMQ14-16U : Ø · 22.2 · brazing connection
RYMQ12U : Ø · 28.6 · brazing connection

High pressure/low pressure gas pipe

REYQ14-20U, REYA14-20A : Ø·19.1· brazing connection

No.	Parts name	Remarks
1	Liquid pipe connection port	See note -3.
2	Gas pipe connection port	See note -3.
3	Equalising pipe connection port High pressure/low pressure gas pipe	See note -3.
4	Power cord routing hole (side)	Ø65
5	Power cord routing hole (front)	Ø80
6	Power cord routing hole (front)	Ø65
7	Power cord routing hole (front)	Ø27
8	Power cord routing hole (bottom)	Ø65
9	Pipe routing hole (front)	
10	Pipe routing hole (bottom)	
11	Grounding terminal	Inside of the switch box (-M8)

2D119091A