

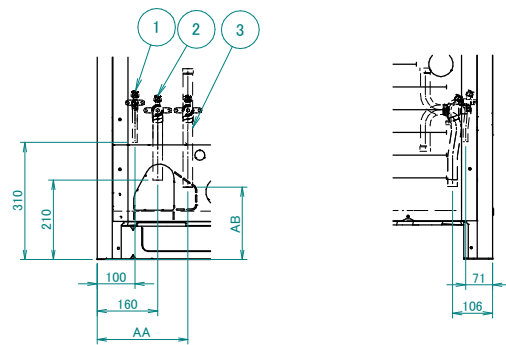





RXYQQ14-20U

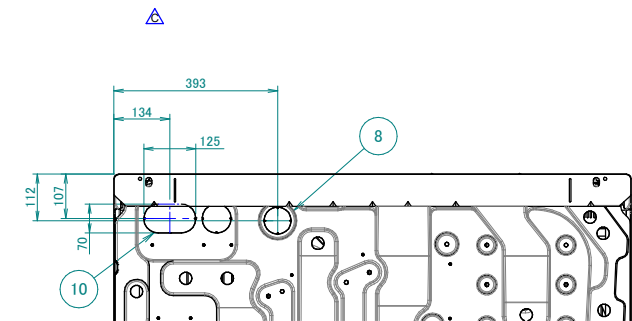

Detail ·B·

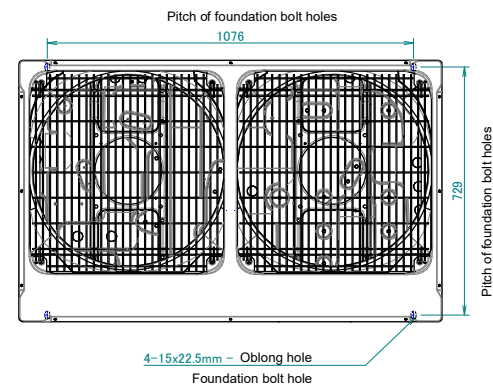

View · C ·

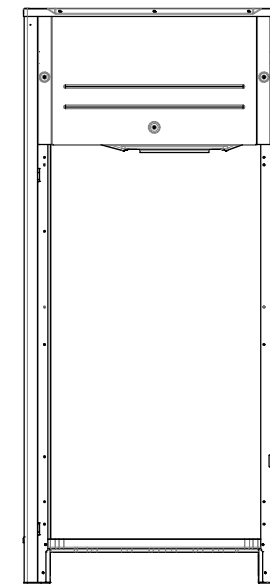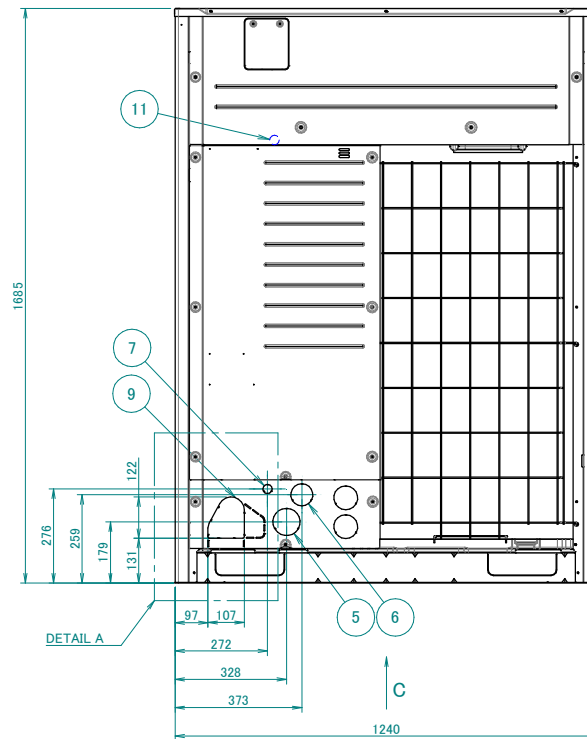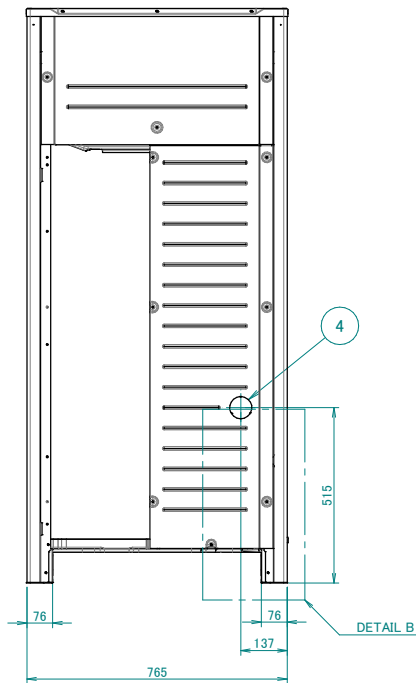

Notes

1. Detail 'A' and detail 'B' indicate the dimensions after fixing the attached piping.
2. Items '4 - 10': Knockout hole.

3. **Gas pipe**

REYA14-18A*, RXYTQ10U

REYQ14-20U

REYA20A*, RYYQ14-20U, RYMQ14-20U RXYQ14-20U, RXYQQ14-20U, RXYTQ12-16U

Liquid pipe

Liquid pipe
RXYTQ10U

REYA14-20A*, RYYQ14-16U, RYMQ14-16U, RXYQ14-16U, RXYQQ14-16U,
REYQ14-20U, RXYTQ12-16U

RYYQ18-20U, RYMQ18-20U.

RYYQ18-20U,

Equalising pipe

Equalizing pipe
RYMQ14-16U

RYSMQ18-20U

High pressure/low pressure gas pipe

REYA14-18A*, REYQ14-20U

REYA20A*

- : Ø ·22.2· brazing connection
- : Ø ·25.4· brazing connection
- : Ø ·28.6· brazing connection

- : Ø ·9.5· brazing connection
- : Ø ·12.7· brazing connection

: Ø ·15.9· brazing connection

3.2.2. Lapping connection

: Ø 28.6· brazing connection

: Ø ·19.1· brazing connection

: Ø ·19.1· brazing connection
: Ø ·22.2· brazing connection

Model	AA	AB
RXYQ14-20U, RYYQ14-20U, RXYQQ14-20U, RXYTQ10-16U	-	-
RYMQ14-16U, REYQ14-20U, REYA14-20A*	240	240
RYMQ18-20U	240	192

No.	Part name	Remark
1	Liquid pipe connection port	See note ③.
2	Gas pipe connection port	See note ③.
3	Equalising pipe connection port High pressure/low pressure gas pipe	See note ③.
4	Power cord routing hole (side)	Ø65
5	Power cord routing hole (front)	Ø80
6	Power cord routing hole (front)	Ø65
7	Power cord routing hole (front)	Ø27
8	Power cord routing hole (bottom)	Ø65
9	Pipe routing hole (front)	
10	Pipe routing hole (bottom)	
11	Grounding terminal	Inside of the switch box (M8)