RXYQQ8-12U



Detail ·A·



Detail ·B·

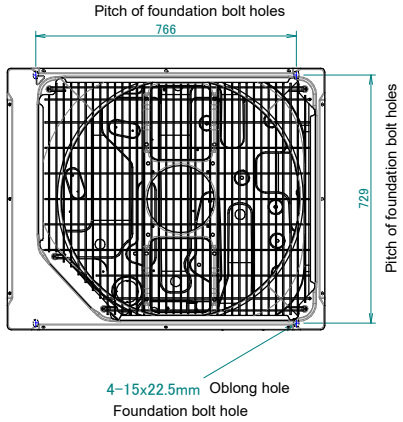

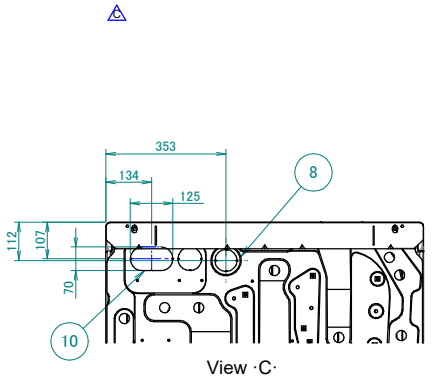

View ·C·

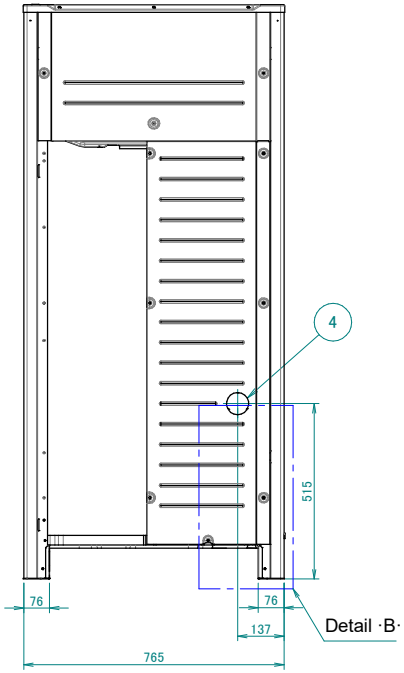

Detail ·B·

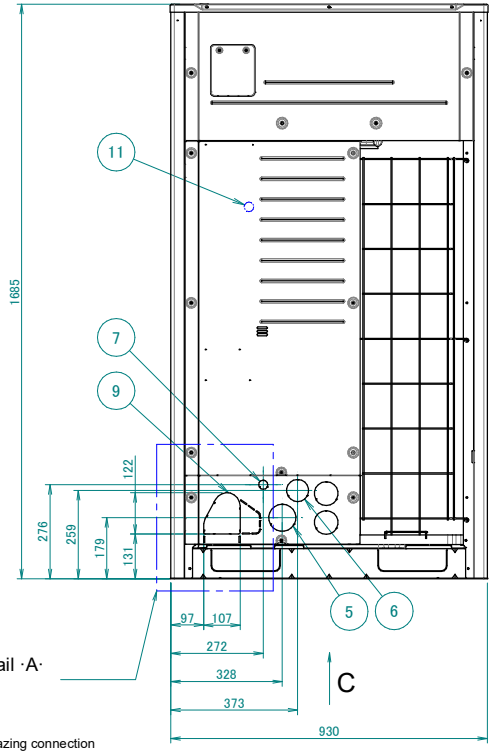

Detail ·A·

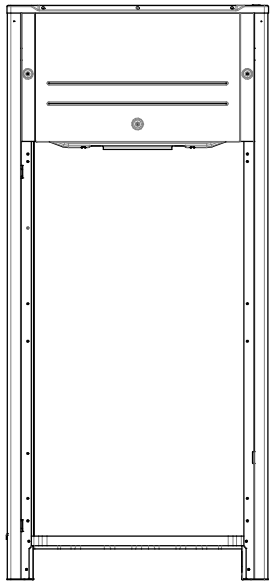

Notes

1. Detail ·A· and detail ·B· indicate the dimensions after fixing the attached piping.
2. Items ·4 - 10:· Knockout hole.
3. **Gas pipe**
   - REMA5A*, REYA8-10A*, RYYQ8U, RYMQ8U, RXYQ8U, RXYQQ8U, RXYTQ8U : Ø ·19.1· brazing connection
   - REYA12A*, RYYQ10U, RYMQ10U, RXYQ10U, RXYQQ10U : Ø ·22.2· brazing connection
   - REMQ5U, REYQ8-12U, RYYQ12U, RYMQ12U, RXYQ12U, RXYQQ12U : Ø ·25.4· brazing connection
   - : Ø ·28.6· brazing connection

   Liquid pipe
   - REMA5A*, REYA8-10A*, RYYQ8-10U, RYMQ8-10U, RXYQ8-10U, RXYQQ8-10U, REMQ5U, REYQ8-12U, RXYTQ8U : Ø ·9.5· brazing connection
   - REYA12A*, RYYQ12U, RYMQ12U, RXYQ12U, RXYQQ12U : Ø ·12.7· brazing connection

   Equalising pipe
   - RYMQ8-10U : Ø ·19.1· brazing connection
   - RYMQ12U : Ø ·22.2· brazing connection

   High pressure/low pressure gas pipe
   - REMA5A*, REYA8-10A* : Ø ·15.9· brazing connection
   - REYA12A*, REMQ5U, REYQ8-12U : Ø ·19.1· brazing connection

Model	AA	AB
RYYQ8-12U, RXYQ8-12U, RXYQQ8-12U, RXYTQ8U	–	–
REMQ5U, RYMQ8-12U, REYQ8-12U, REMA5A*, REYA8A*-12A*	240	240

No.	Part name	Remark
1	Liquid pipe connection port	See note ·3·.
2	Gas pipe connection port	See note ·3·.
3	Equalising pipe connection port High pressure/low pressure gas pipe	See note ·3·.
4	Power cord routing hole (side)	∅65
5	Power cord routing hole (front)	∅80
6	Power cord routing hole (front)	∅65
7	Power cord routing hole (front)	∅27
8	Power cord routing hole (bottom)	∅65
9	Pipe routing hole (front)	
10	Pipe routing hole (bottom)	
11	Grounding terminal	Inside of the switch box (·M8·)