
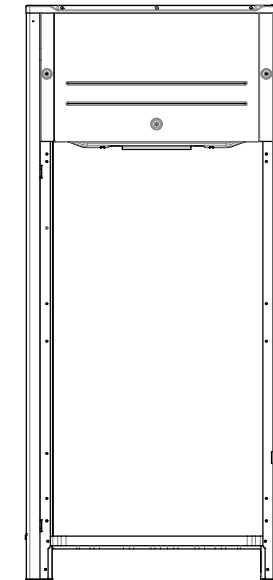
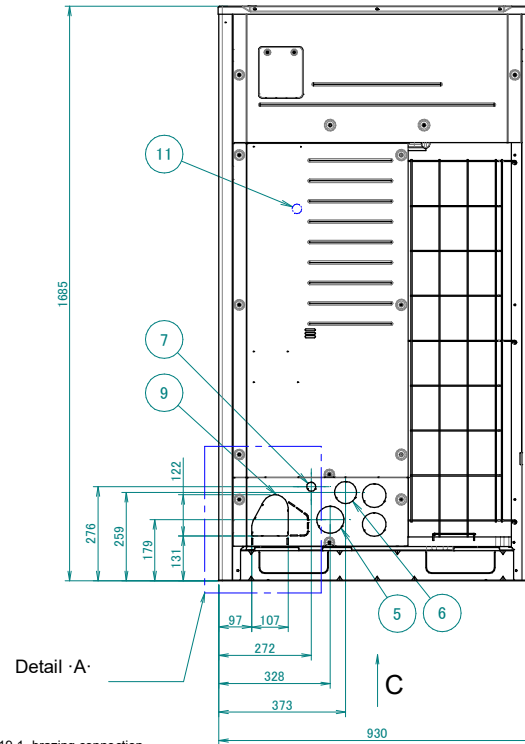
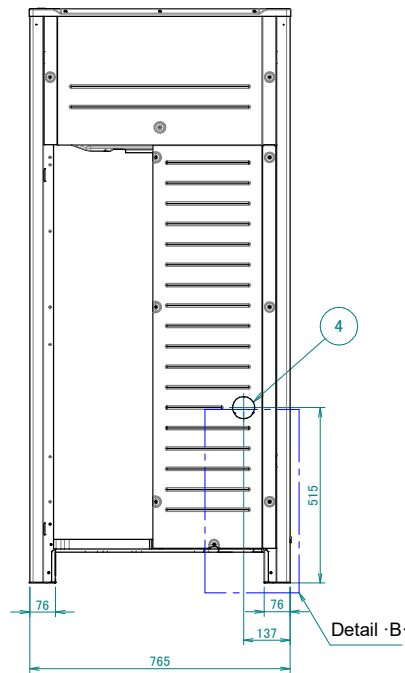
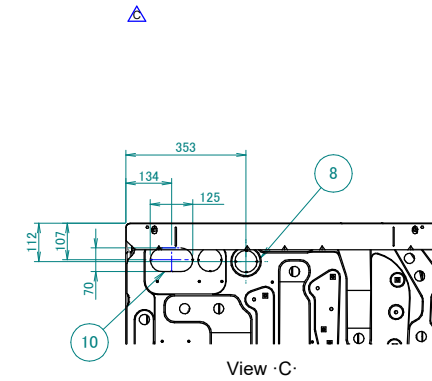
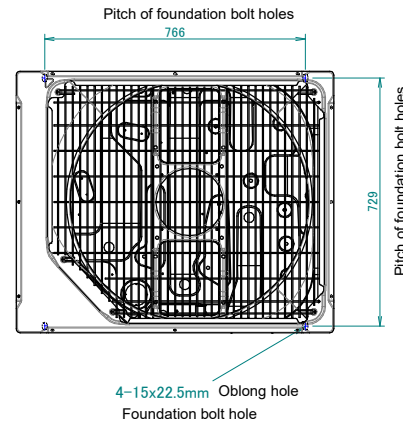


RYYQ8-12U

RYMQ8-12U

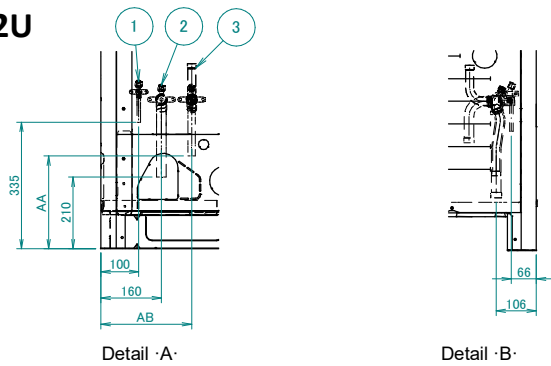

Notes

- Detail A and detail B indicate the dimensions after fixing the attached piping.
- Items 4 - 10: Knockout hole.

3. Gas pipe

REMA5A*, REYA8-10A*, RYYQ8U, RYM8U, RXYQ8U, RXYQQ8U, RXYTQ8U	: Ø 19.1: brazing connection
REYA12A*, RYYQ10U, RYM10U, RXYQ10U, RXYQQ10U	: Ø 22.2: brazing connection
REM5U, REYQ8-12U, RYYQ12U, RYM12U, RXYQ12U, RXYQQ12U	: Ø 25.4: brazing connection
	: Ø 28.6: brazing connection

Liquid pipe

REMA5A*, REYA8-10A*, RYYQ8-10U, RYM8-10U, RXYQ8-10U, RXYQQ8-10U, REM5U, REYQ8-12U, RXYTQ8U	: Ø 9.5: brazing connection
REYA12A*, RYYQ12U, RYM12U, RXYQ12U, RXYQQ12U	: Ø 12.7: brazing connection

Equalising pipe

RYMQ8-10U	: Ø 19.1: brazing connection
RYMQ12U	: Ø 22.2: brazing connection

High pressure/low pressure gas pipe

REMA5A*, REYA8-10A*	: Ø 15.9: brazing connection
REYA12A*, REM5U, REYQ8-12U	: Ø 19.1: brazing connection

No.	Part name	Remark
1	Liquid pipe connection port	See note 3.
2	Gas pipe connection port	See note 3.
3	Equalising pipe connection port	See note 3.
	High pressure/low pressure gas pipe	
4	Power cord routing hole (side)	Ø65
5	Power cord routing hole (front)	Ø80
6	Power cord routing hole (front)	Ø65
7	Power cord routing hole (front)	Ø27
8	Power cord routing hole (bottom)	Ø65
9	Pipe routing hole (front)	
10	Pipe routing hole (bottom)	
11	Grounding terminal	Inside of the switch box (-M8-)

Model	AA	AB
RYYQ8-12U, RXYQ8-12U, RXYQ08-12U, RXYTQ8U	-	-
REM5U, RYM8-12U, REYQ8-12U, REMA5A*, REYA8*-12A*	240	240

2D119001D