


Sound Power overall (dBA): FWQ17AAT(N/T/V)5V1(-/R)

Whole casing


FWQ17AAT
Whole Sound Power

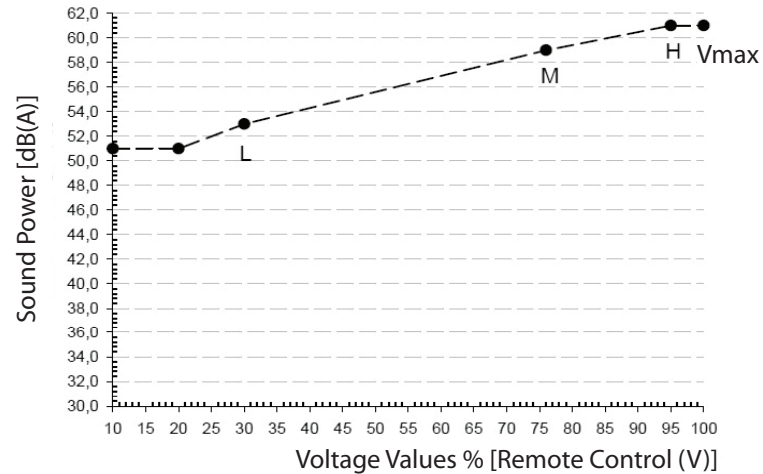

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	51,0
2.0 V	51,0
3.0 V (L) @26 Pa	53,0
7.6 V (M) @50 Pa	59,0
9.5 V	61,0
10.0 V (H) (max) @60 Pa	61,0

Discharge


FWQ17AAT
Discharge Sound Power

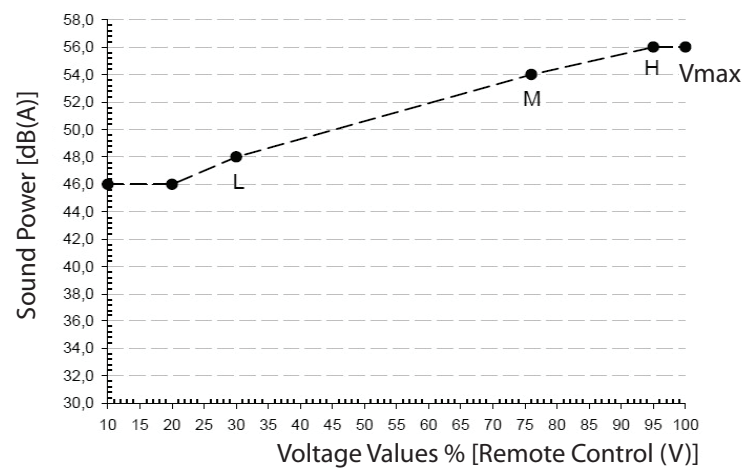

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	46,0
2.0 V	46,0
3.0 V (L) @26 Pa	48,0
7.6 V (M) @50 Pa	54,0
9.5 V	56,0
10.0 V (H) (max) @60 Pa	56,0

Inlet + casing

FWQ17AAT
Suction Sound Power

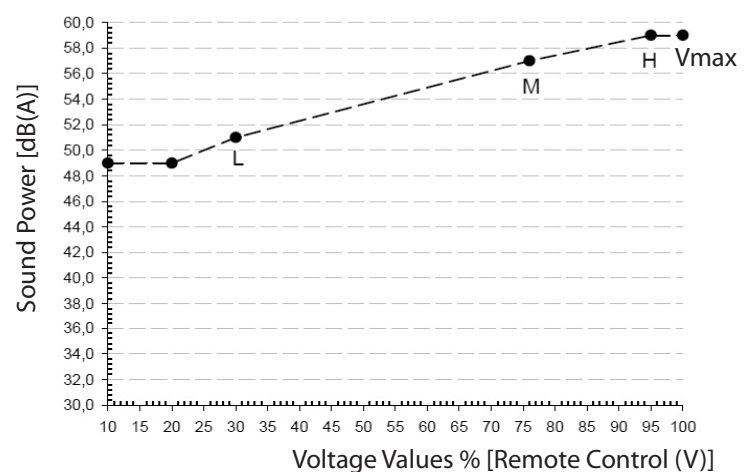

Fan Speed (0V-10V)	
Fan Speed (V)	Sound Power dB(A)
1.0 V (min)	49,0
2.0 V	49,0
3.0 V (L) @26 Pa	51,0
7.6 V (M) @50 Pa	57,0
9.5 V	59,0
10.0 V (H) (max) @60 Pa	59,0

NOTE

1. Test Condition: Dry Bulb Temperature: 20.0°C, Wet Bulb Temperature: 15.0°C
2. Voltage Values: 100% = 10.0V
3. Sound power measurement standard is EN 3741 (1999)