


EGSAH-D9W / EGSAX-D9W / EGSAX-D9WG

- ① Water out connection ø 22mm
- ② Water in connection ø 22mm
- ③ Tank out connection ø 22mm
- ④ Tank in connection ø 22mm
- ⑤ Shut-off valve
- ⑥ Safety valve
- ⑦ Automatic air purge valve
- ⑧ Drain valve
- ⑨ Pump
- ⑩ Plate heat exchanger
- ⑪ Flow sensor
- ⑫ Shut-off valve
- ⑬ Backup heater
- ⑭ 3-way valve
- ⑮ 4-way valve
- ⑯ Low pressure sensor
- ⑰ High pressure sensor
- ⑱ High pressure switch

- ⑲ Muffler
- ⑳ Compressor
- ㉑ Check valve
- ㉒ Service port
- ㉓ Space heating water pressure sensor
- ㉔ Rectifier
- ㉕ Heat sink
- ㉖ Filter
- ㉗ Electronic expansion valve
- ㉘ Brine in connection ø 28mm
- ㉙ Brine out connection ø 28mm

- ㉚ Recirculation connection 3/4" (G) (female)

- ㉛ R2T (A7P) - Thermistor (discharge)
- ㉜ R3T (A7P) - Thermistor (suction compressor)
- ㉝ R4T (A7P) - 2-phase sensor (Tx)
- ㉞ R5T (A7P) - Entering brine temperature
- ㉟ R6T (A7P) - Leaving brine temperature
- ㊱ R1T (A1P) - Outlet water heat exchanger thermistor
- ㊲ R2T (A1P) - Outlet water backup heater thermistor
- ㊳ R3T (A1P) - Refrigerant temperature sensor (liquid)
- ㊴ R4T (A1P) - Inlet water thermistor
- ㊵ R5T (A1P) - Tank thermistor
- ㊶ R6T (A1P) - Tank thermistor

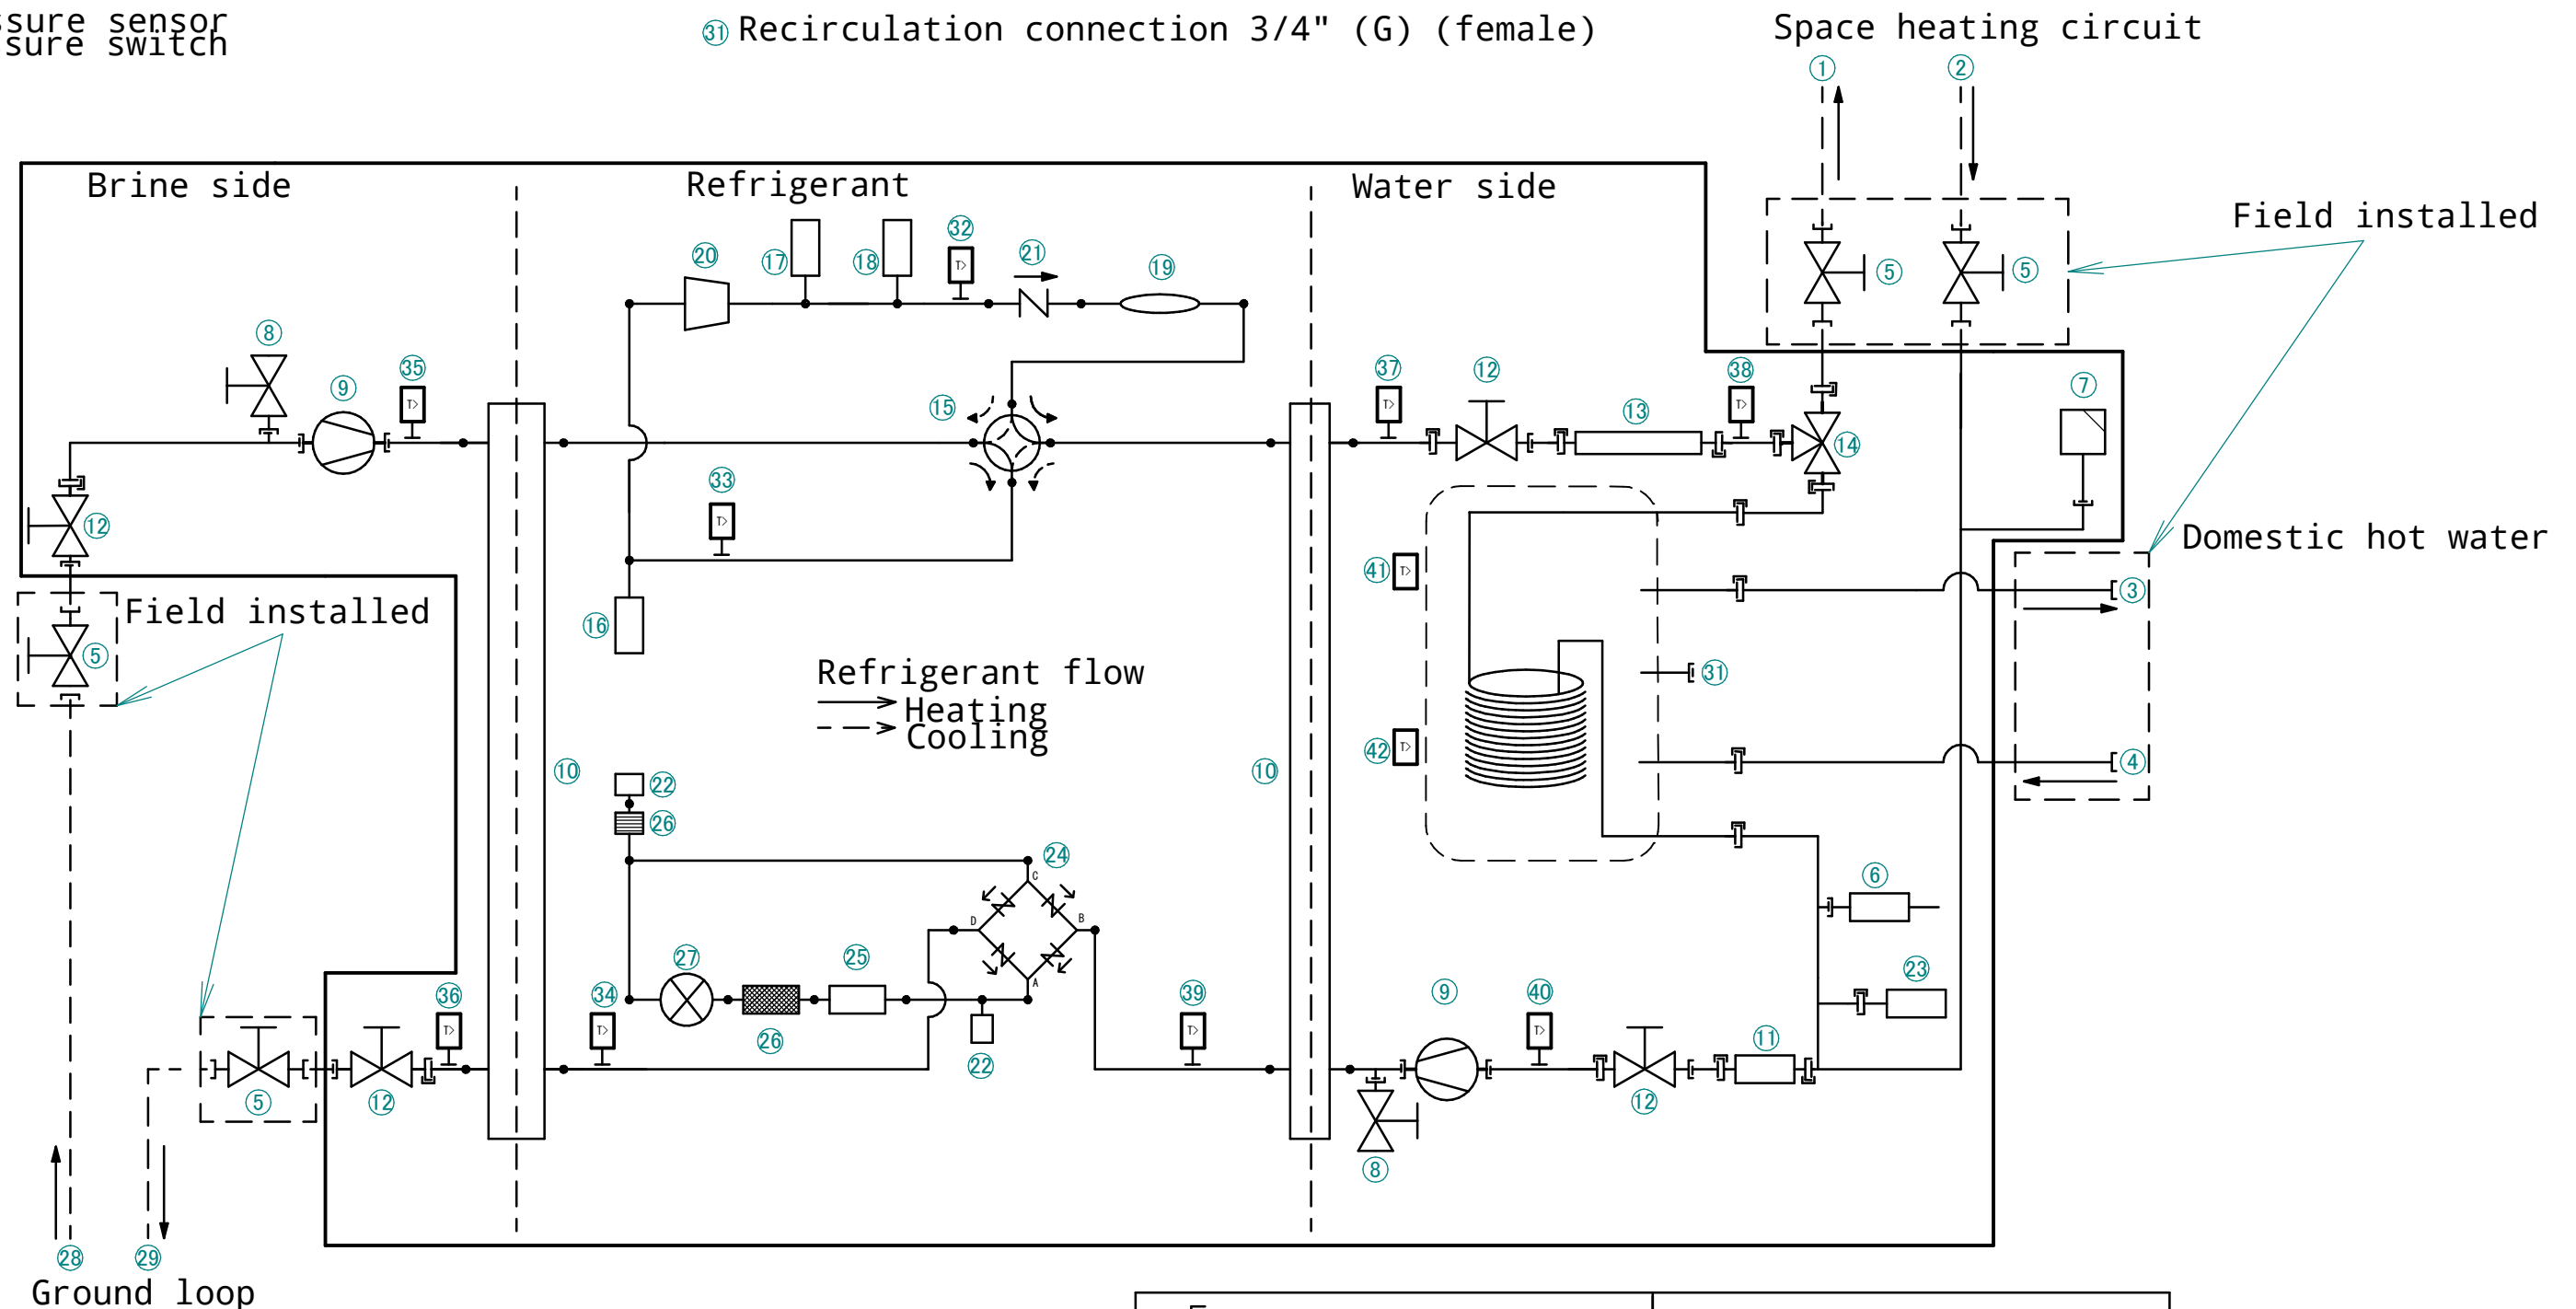

 Screw connection	 Brazed connection
 Quick coupling	

3D121963B

