


Notes

- These figures assume the following operation conditions
Indoor and outdoor units
Equivalent piping length: 5-m
Level difference: 0-m
- Depending on operation and installation conditions, the indoor unit can change over to freeze-up operation (indoor de-icing).
- To reduce the freeze-up operation (indoor de-icing) frequency, it is recommended to install the outdoor unit in a location not exposed to wind.
- Operation range is valid in case direct expansion indoor units are used.
If other indoor units are used, refer to the documentation of the respective indoor units.
- ///: Unit operation is possible, but no guaranteed capacity
- If the unit is selected to operate at ambient temperatures $< -5^{\circ}\text{C}$ for 5 days or more, with relative humidity levels $> 95\%$, it is recommended to apply a Daikin range specifically designed for such application.
For more information, contact your dealer.

Cooling

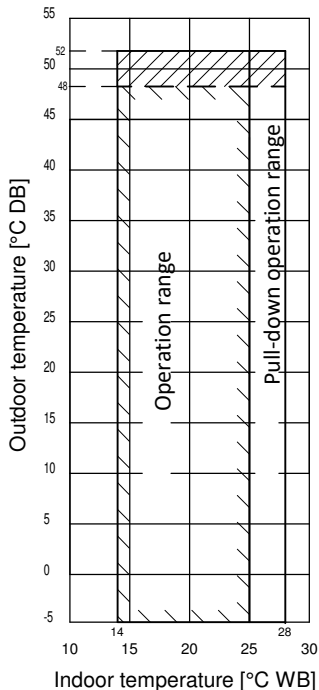

Heating

